



SGM05FB8D2

Femto-Farad Capacitance 8-Channel ESD Protection

GENERAL DESCRIPTION

The SGM05FB8D2 is a femto-farad capacitance ESD protection device. As a new generation TVs, it is applied to protect high-speed data lines from electrostatic discharge.

FEATURES

- **High ESD Withstand Voltage:**
IEC 61000-4-2: $\pm 17\text{kV}$ (Air)
IEC 61000-4-2: $\pm 15\text{kV}$ (Contact)
- **Low Profile Package:** UTDFN-5.5 \times 1.5-18L
- **Working Voltage:** 5V and Below
- **Rated Peak Pulse Current:** 2.4A
- **Channel Input Capacitance:** 0.3pF (TYP)

PRODUCT SUMMARY

V_{RWM} (MAX)	I_{PPM} (MAX)	C_{IN} (TYP)
5V	2.4A	0.3pF

APPLICATIONS


- Thunderbolt
- HDMI
- USB 3.0
- DisplayPort Interface
- IEEE 1394
- 10/100Mbit/s Ethernet
- Desktop and Notebooks

ABSOLUTE MAXIMUM RATINGS


PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Current (t_p : 8/20 μ s)	I_{PPM}	2.4	A
ESD IEC 61000-4-2 (Air)	V_{ESD}	± 17	kV
ESD IEC 61000-4-2 (Contact)		± 15	
Operating Temperature Range	T_{OP}	-40 to +125	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^{\circ}\text{C}$
Lead Temperature (Soldering, 10s)		+260	$^{\circ}\text{C}$

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

EQUIVALENT CIRCUIT

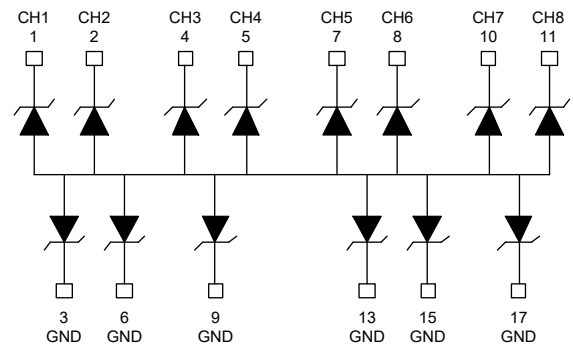

PIN CONFIGURATION

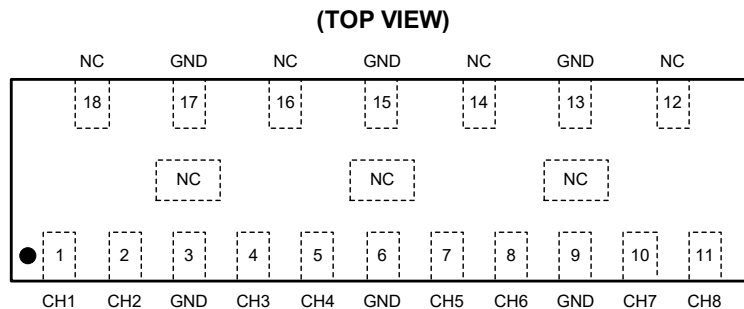


PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM05FB8D2	UTDFN-5.5×1.5-18L	-40°C to +125°C	SGM05FB8D2XUEE18G/TR	SGM05FB8D2 XXXXX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

XXXXX




Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

ELECTRICAL PARAMETERS

SYMBOL	PARAMETER
V_{RWM}	Reverse Stand-Off Voltage
V_{BR}	Reverse Breakdown Voltage
I_R	Reverse Leakage Current
$I_R @ BR$	Reverse Leakage Current @ Breakdown
V_C	Clamping Voltage @ I_{PP}
I_{PP}	Peak Pulse Current
R_{DYN}	Dynamic Resistance

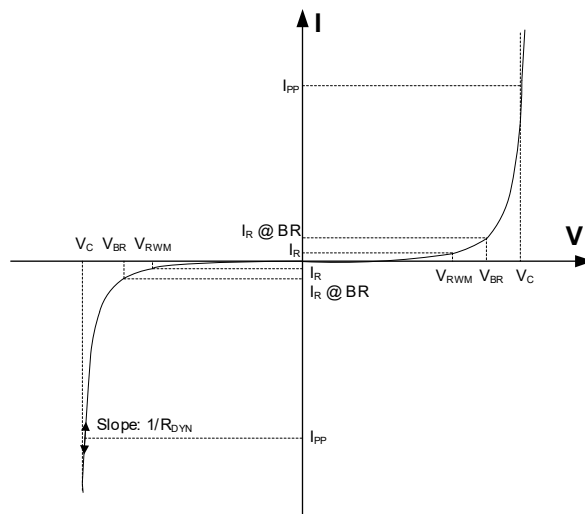

ELECTRICAL CHARACTERISTICS

(T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Reverse Stand-Off Voltage	V _{RWM}	CHx pin to GND			5	V
Reverse Breakdown Voltage	V _{BR}	I _R = 1mA, CHx pin to GND	6	7.2	8.5	V
Reverse Leakage Current	I _R	V _R = 5V, CHx pin to GND			700	nA
Channel Input Capacitance	C _{IN}	V _R = 0V, f = 1MHz, CHx pin to GND		0.3	0.4	pF
Channel-to-Channel Capacitance	C _{XTALK}	V _R = 0V, f = 1MHz, I/O to I/O		0.3		pF
Surge Clamping Voltage ⁽¹⁾	V _{C-SURGE}	I _{PPM} = 2.4A		11.5		V
ESD Clamping Voltage ⁽²⁾	V _C	I _{TLP} = 8A (Equivalent IEC61000-4-2 Contact + 4kV)		15.5		V
		I _{TLP} = 16A (Equivalent IEC61000-4-2 Contact + 8kV)		22.6		
Dynamic Resistance ⁽²⁾	R _{DYN}	t _p = 100ns		0.89		Ω

NOTES:

1. Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC 61000-4-5, 2Ω source impedance.
2. Non-repetitive current pulse, transmission line pulse (TLP) t_p = 100ns; square pulse.

Positive 8kV:

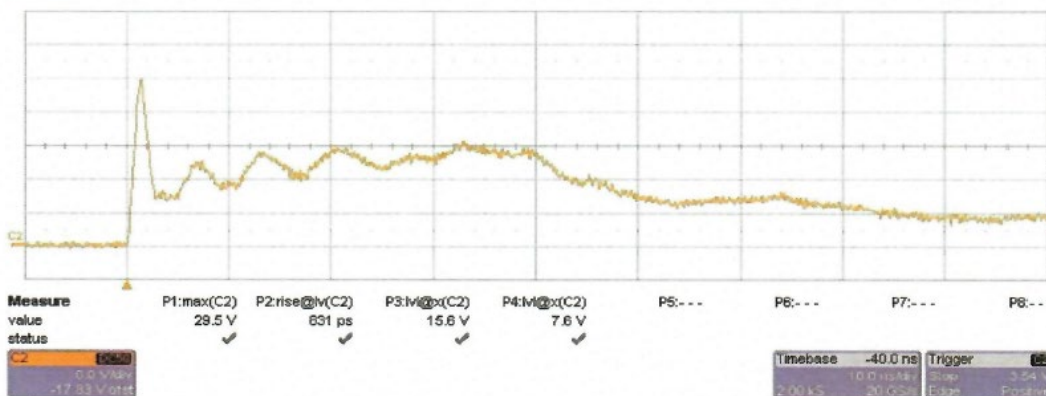


Figure 1. Typical Pulses ESD 8kV Contact per IEC 61000-4-2

Negative 8kV:


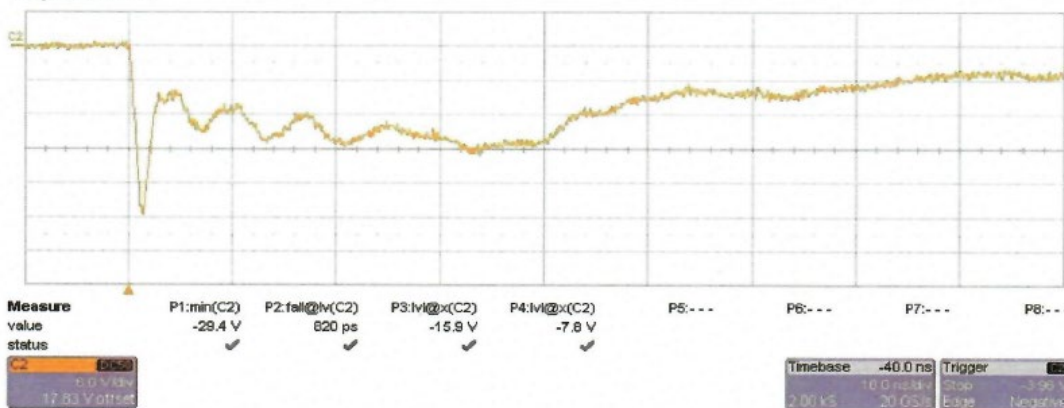



Figure 2. Typical Pulses ESD -8kV Contact per IEC 61000-4-2

TYPICAL PERFORMANCE CHARACTERISTICS


ESD Pulse Waveform per IEC 61000-4-2

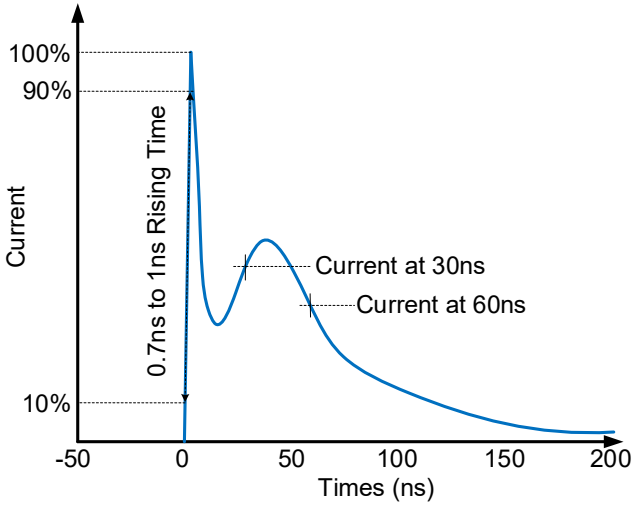


8/20µs Waveform per IEC 61000-4-5

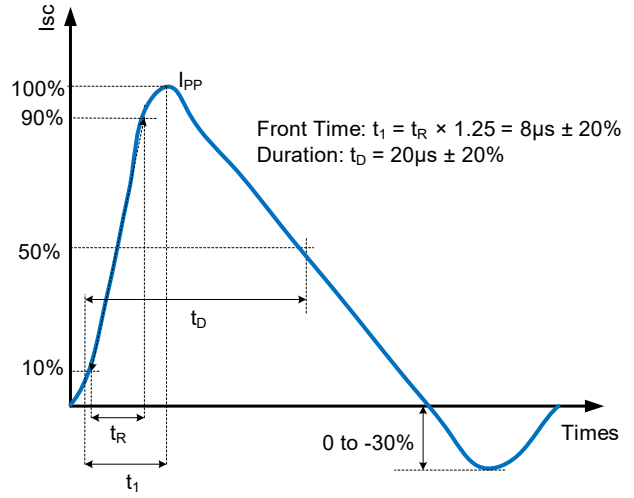


TLP_I/O Pin (-) to GND Pin (+)

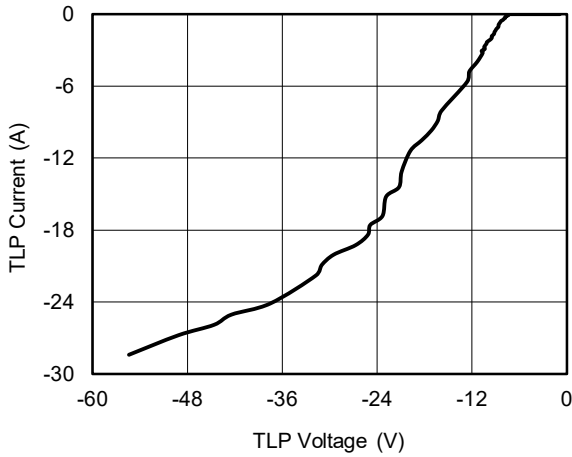


TLP_I/O Pin (+) to GND Pin (-)

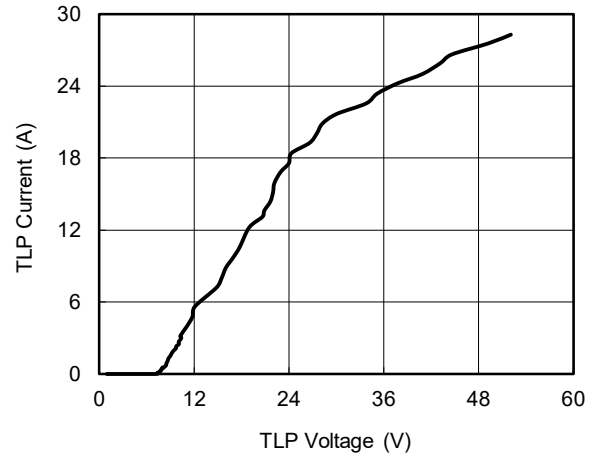

IV Curve

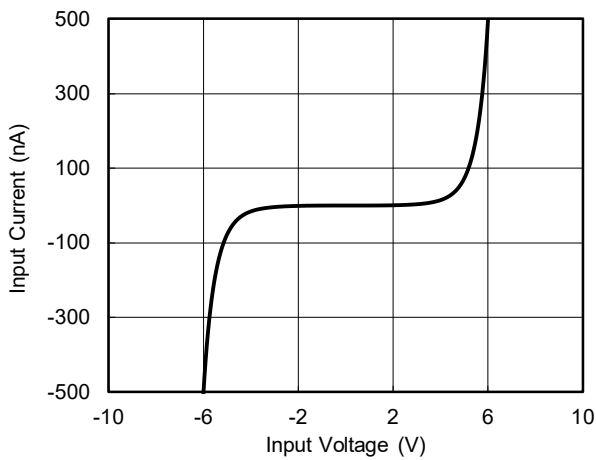


Capacitance vs. Reverse voltage

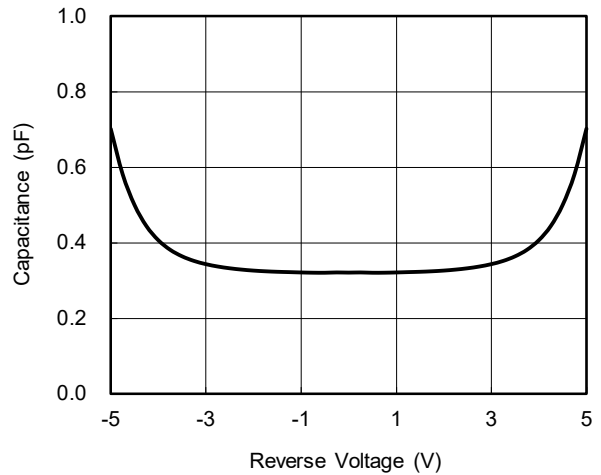

APPLICATION INFORMATION

The SGM05FB8D2 is applied to keep eight data lines protect from transient over-voltage like ESD stress pulse. The eight protected data lines are connected to the protection pin 1, pin 2, pin 4, pin 5, pin 7, pin 8, pin 10 and pin 11. The pin 3, pin 6, pin 9, pin 13, pin 15 and pin 17 are the negative pins connect to GND.

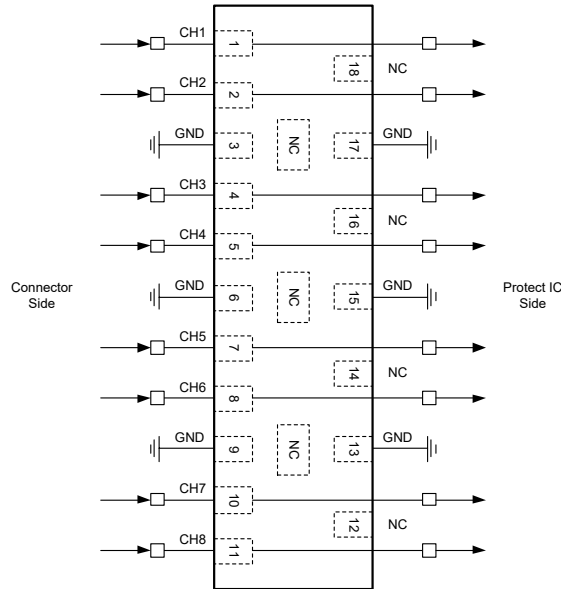

The recommended guidelines are as follows:

1. TVS Placement

Place the TVS as close as possible to the input connector.

2. TVS's Trace Layout

- Avoid running protected traces in parallel with unprotected traces.
- Minimize the path length between the TVS and the protected line.
- Minimize parallel signal path length.
- Route the protected traces as straight as possible.

3. GND Layout

- Avoid using a common ground point shared with the TVS transient return path.
- Minimize the length of the TVS transient return path to ground.
- Use ground vias as close as possible to the TVS transient return to ground.

REVISION HISTORY


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original (JULY 2024) to REV.A	Page
Changed from product preview to production data.....	All


PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS


UTDFN-5.5×1.5-18L

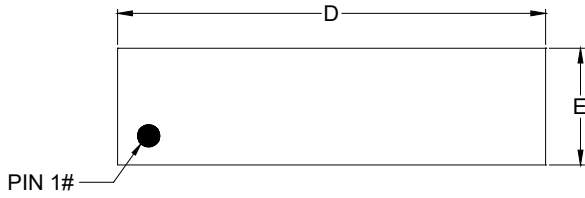

TOP VIEW

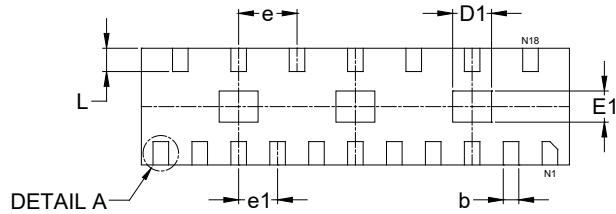


BOTTOM VIEW

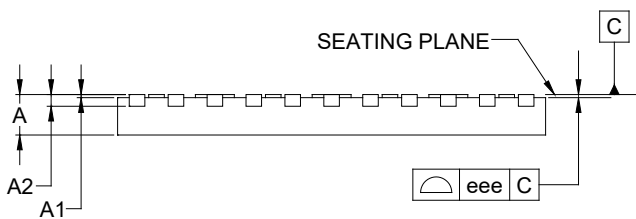

SIDE VIEW



DETAIL A
ALTERNATE TERMINAL
CONSTRUCTION

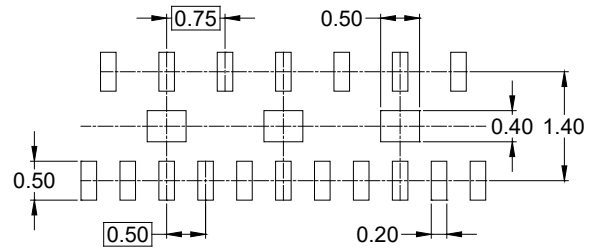

RECOMMENDED LAND PATTERN (Unit: mm)


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	0.450	-	0.550
A1	-	-	0.050
A2	0.150 REF		
b	0.150	-	0.250
D	5.400	-	5.600
E	1.400	-	1.600
D1	0.400	-	0.600
E1	0.300	-	0.500
e	0.750 BSC		
e1	0.500 BSC		
L	0.200	-	0.400
eee	0.080		

NOTE: This drawing is subject to change without notice.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

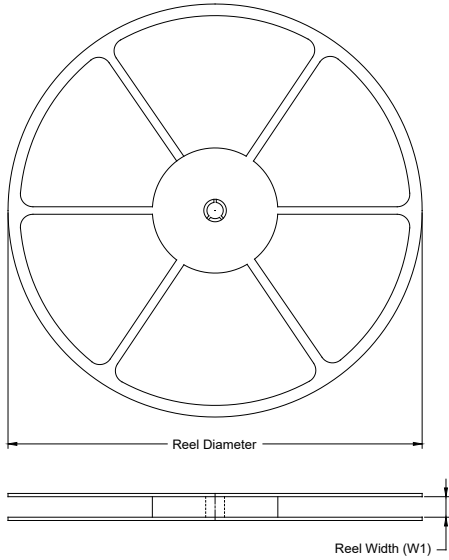

TAPE DIMENSIONS

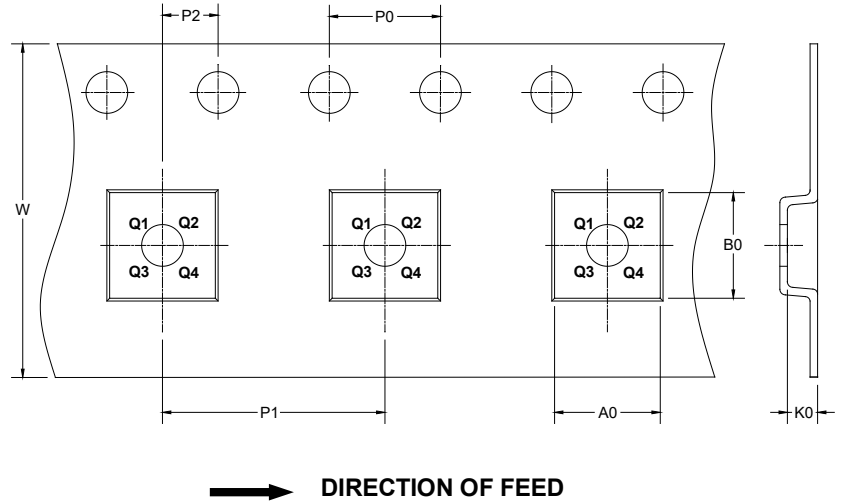

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
UTDFN-5.5×1.5-18L	7"	12.8	1.75	5.75	0.70	4.0	4.0	2.0	12.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

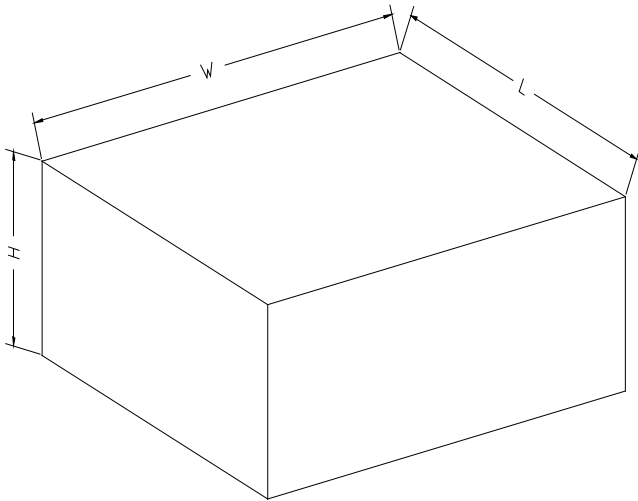

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002